


YJ Planar Schottky Barrier Diode Die Specification

200V 20A, 108mil, Schottky barrier diode die based on silicon planar process
Part No.: PSB108H200AS-280A

Main Products Characteristics

- Average forward current: $I_{F(AV)} = 20\text{ A}$
- Maximum operating junction temperature: $T_j = 175\text{ °C}$
- ESD rating: >2KV, per IEC61000-4-2 (Contact Discharge)
- Top metal: AL

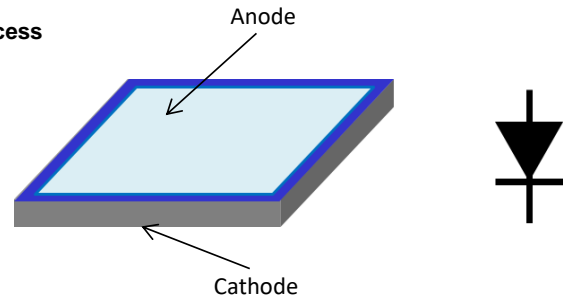

Maximum Ratings

| Parameter | Symbol | Rating |
|---|-------------|----------------|
| Repetitive peak reverse voltage | V_{RRM} | 200 V |
| Average forward current | $I_{F(AV)}$ | 20 A |
| Non-repetitive peak surge current ($t_p = 8.3\text{ ms}$, halfwave, 1 cycle) | I_{FSM} | 150 A |
| Storage temperature range | T_{stg} | -50 to +175 °C |
| Maximum operating junction temperature | T_j | 175 °C |

Static Electrical Characteristics ($T_a = 25\text{ °C}$)

| Parameter | Symbol | Value | |
|---|----------|-------|---------|
| | | Spec | Typical |
| Reverse breakdown voltage $I_R = 1\text{ mA}$ | V_{BR} | 210 V | 230V |
| Maximum forward voltage drop $I_F = 20\text{ A}$ Pulse Test: $t_p = 300\text{ }\mu\text{s}$, $\delta \leq 2\%$ | V_F | 0.90V | 0.86V |
| Maximum reverse current $V_R = V_{RRM}$ Pulse Test: $t_p = 300\text{ }\mu\text{s}$, $\delta \leq 2\%$ | I_R | 3uA | 0.3uA |

Device Schematics and Outline Drawing

| | |
|-------------------|-----------------|
| Die Thickness * | 11 Mils |
| Die Size ** | 108 Mils |
| Top Metal Pad | 2*51.5*104 Mils |
| Active Area | 2*46.8*99 Mils |
| Space between die | 0.98 Mils |
| Top Metal | AL |
| Back Metal | Ag |

Note: 1 *: Also can offer device with 8 mils thickness
2 **: Cutting street width is around 1.5 mils

Important Notice

| | |
|---|--|
| <p>Specification apply to die only. Actual performance may degrade when assembled.</p> <p>Yangjie Electronics does not guarantee device performance after assembly. All operating parameters must be validated for each customer application by customer's technical experts.</p> <p>Data sheet information is subjected to change without notice.</p> | <p>Recommended Storage Environment:</p> <p>Store in original container, in dessicated nitrogen, with no contamination.</p> <p>Shelf life for parts stored in above condition is 2 years.</p> <p>If the storage is done in normal atmosphere shelf life is reduced to 6 months.</p> |
|---|--|